




FIELD DRAIN DETAIL

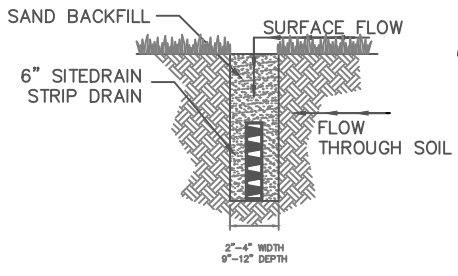


PERIMETER DRAIN DETAIL

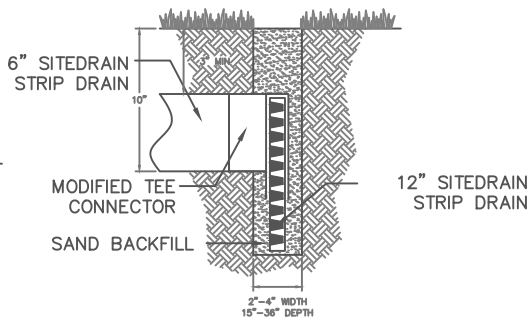

PERIMETER DRAIN DETAIL

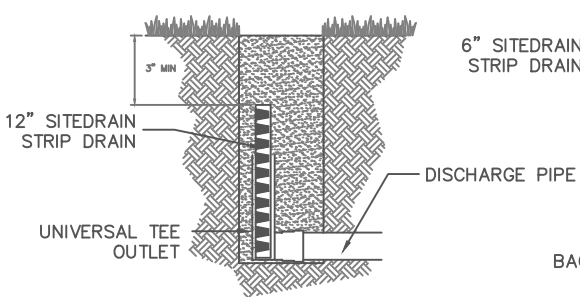

**PERIMETER DRAIN DETAIL
PIPE OPTION**

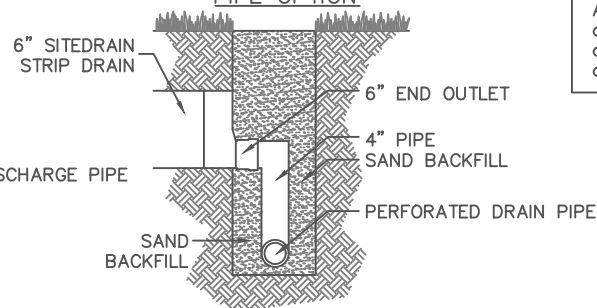

Specific Notes:
 -Geocomposite drainage system is comprised of 6" strip drain typically spaced 8'-10' in infield and 10'-12' in outfield. Perimeter drain is typically 12" strip drain.
 -6" and 12" strip drain are joined using a 6" Modified Tee Connector. At each junction, it is recommended that 3"-wide underground-rated tape be used to secure strip drain sections to the fitting.
 -The contained information is for reference only. It is not intended for use as an engineering specification. Additionally, it is the responsibility of the user to ensure the suitability of SITEDRAIN Strip products for the outlined project.



AWD - AMERICAN WICK DRAIN CORPORATION
 1209 AIRPORT ROAD
 MONROE, NC 28110 USA
 TOLL-FREE (US/CAN): +1 800-242-9425
 PHONE: +1 704-238-9200
 EMAIL: INFO@AWD-USA.COM
 WEBSITE: WWW.AWD-USA.COM



NATURAL TURF BASEBALL FIELD TRENCH DRAINAGE

PREFABRICATED GEOCOMPOSITE DRAINAGE SYSTEM

DRAWN/EDITED BY : SMM	PROJECT : TYPICAL DETAILS	REVISION DATE : 6/2/2022
CHECKED/APRVD BY : SMM	SCALE : NTS	SHEET 1 OF 1